



GK-Kozjak 22

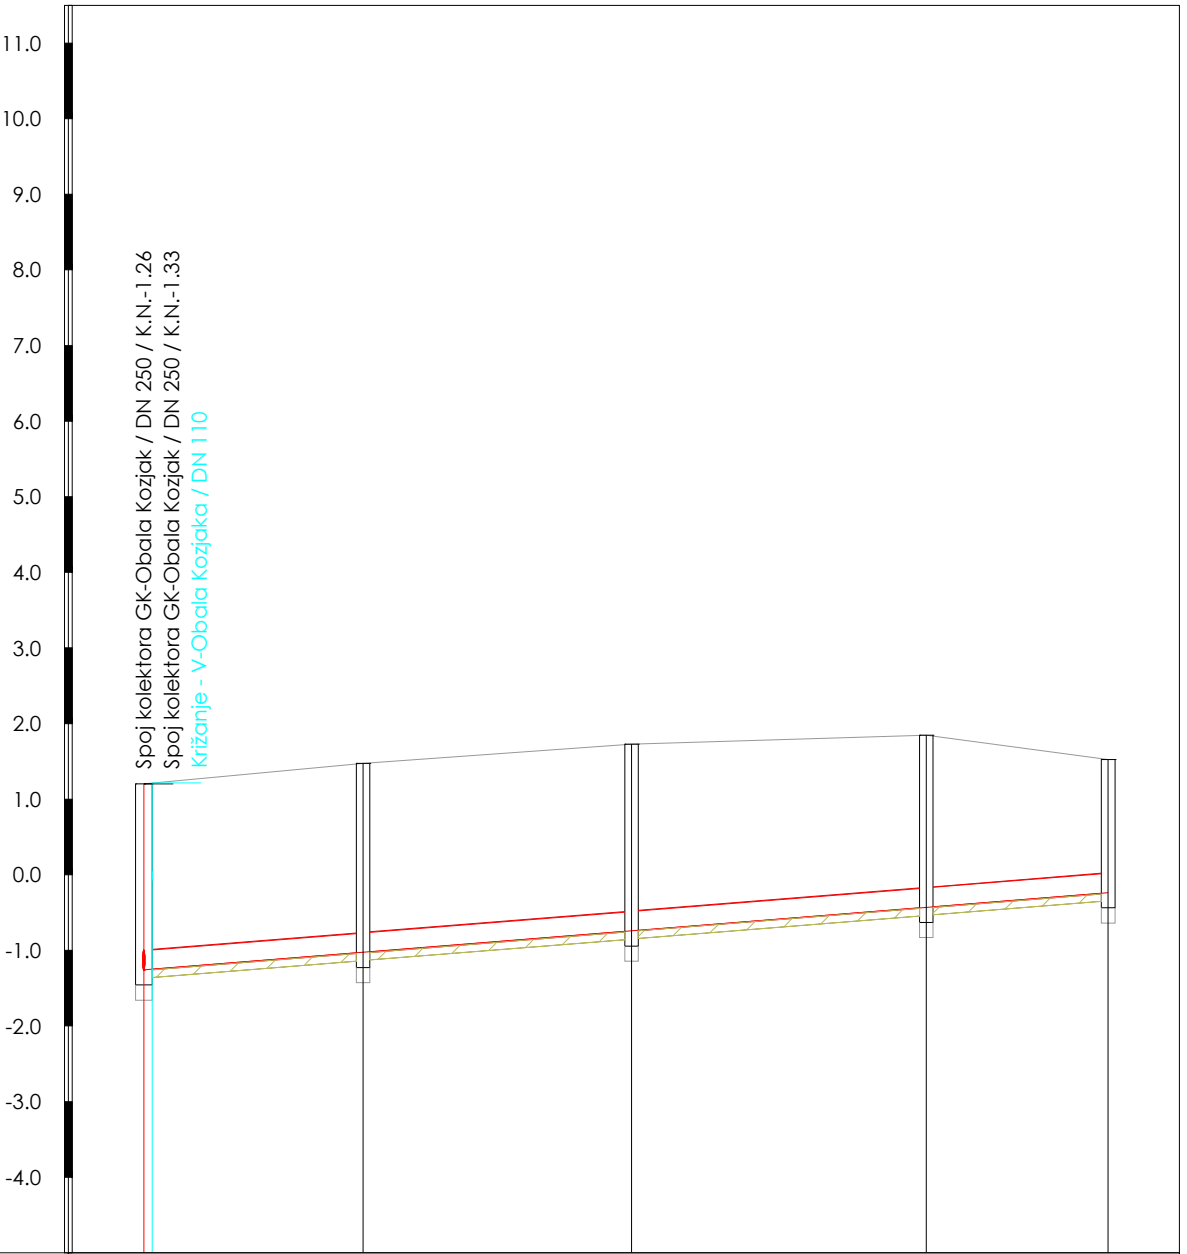


OZNAKA I RAZMAK ČVOROVA	k666	29.00	k694	35.50	k693	39.00	k692	24.05	k691
MATERIJAL I UNUTARNJI PROFIL CIJEVI	GRP 250mm								
NAGIB NIVELETE	8.0 ‰								
OPIS OKNA	GRP Ø 1000		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800
KOTA TERENA [m n.m.]	1.20		1.47		1.73		1.84		1.53
KOTA NIVELETE [m n.m.]	-1.26		-1.02		-0.74		-0.43		-0.24
KOTA DNA ROVA [m n.m.]	-1.36		-1.13		-0.85		-0.54		-0.34
DUBINA ISKOPA ROVA [m]	2.57		2.61		2.58		2.38		1.87
HORIZONTALNI KUT			182.12°		177.81°		179.21°		
VERTIKALNI KUT			0.00°		0.00°		0.00°		
STACIONAŽA TERENA	0+000.00		0+029.00		0+064.51		0+103.51		0+127.55

GK-Kozjak 24

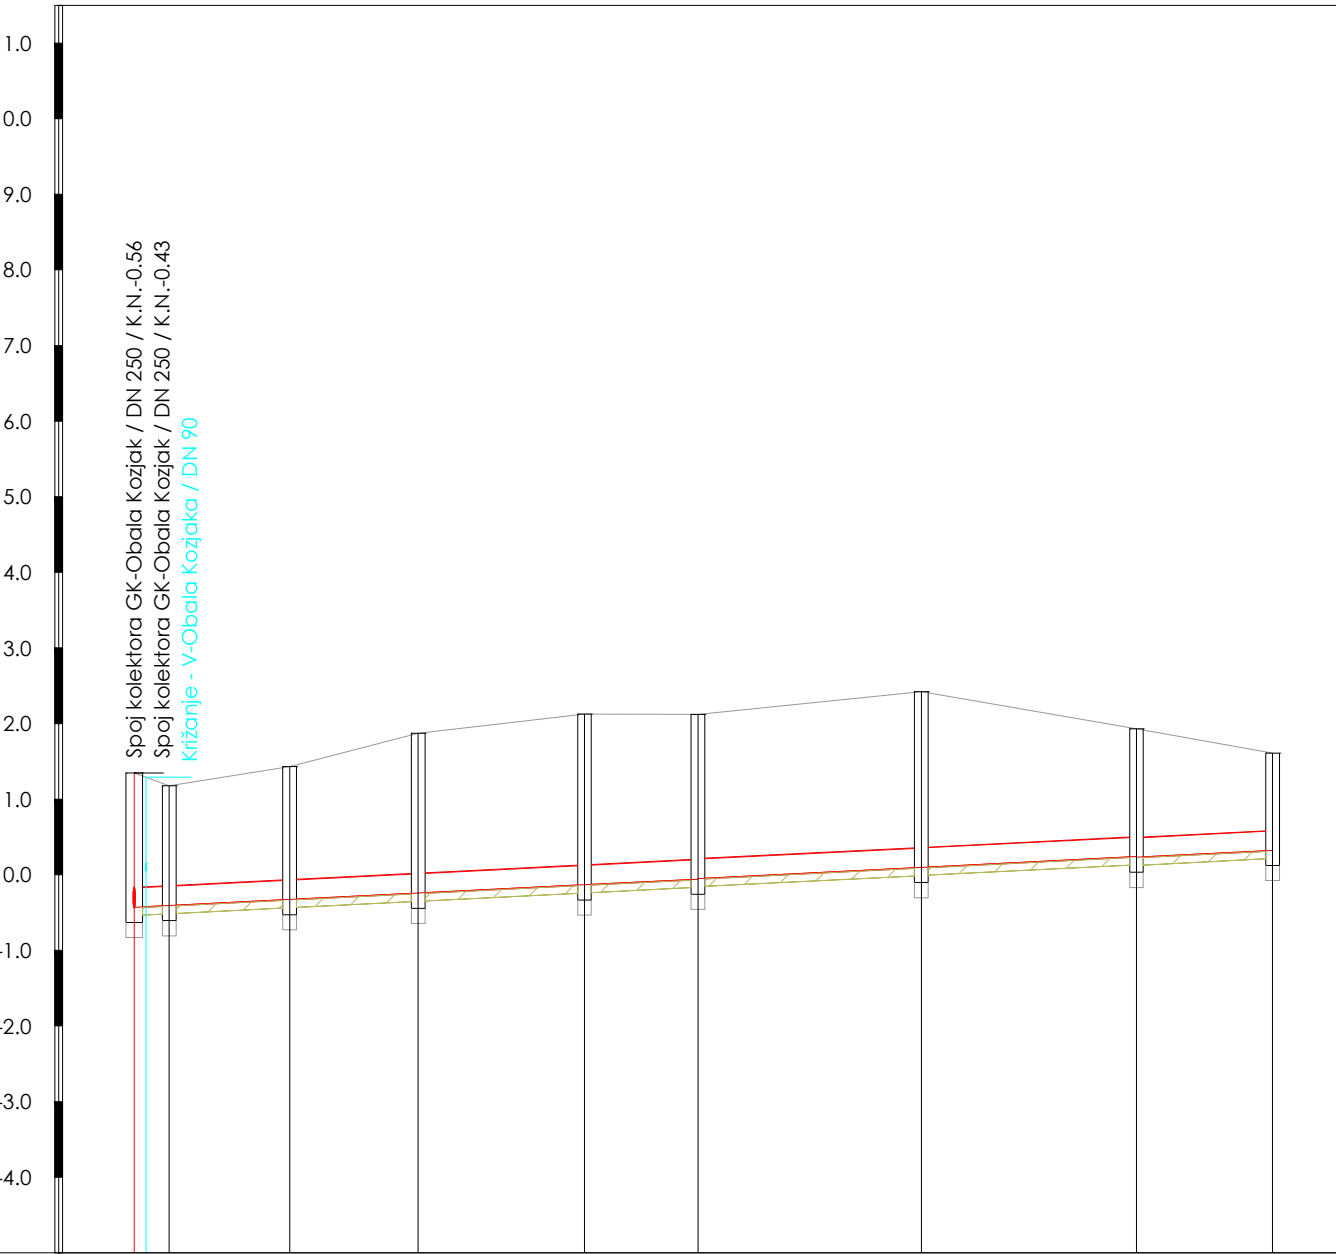


OZNAKA I RAZMAK ČVOROVA	k669	5.92	k676	17.00	k674	22.00	k673	15.00	k672	29.55	k671	28.46	k670	18.00	k669
MATERIJAL I UNUTARNJI PROFIL CIJEVI	GRP 250mm														
NAGIB NIVELETE	5.0 ‰														
OPIS OKNA	GRP Ø 1000		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800
KOTA TERENA [m n.m.]	1.35		1.18		1.43		1.87		2.12		2.12		2.42		1.93
KOTA NIVELETE [m n.m.]	-0.43		-0.41		-0.33		-0.24		-0.13		-0.06		-0.05		0.10
KOTA DNA ROVA [m n.m.]	-0.54		-0.51		-0.43		-0.35		-0.24		-0.16		-0.05		0.13
DUBINA ISKOPA ROVA [m]	1.88		1.69		1.87		2.22		2.36		2.29		2.43		1.80
HORIZONTALNI KUT			156.32°		178.57°		179.50°		179.86°		179.63°		181.19°		177.97°
VERTIKALNI KUT			0.00°		0.00°		0.00°		0.00°		0.00°		0.00°		0.00°
STACIONAŽA TERENA	0+000.00		0+004.44		0+020.56		0+037.56		0+059.56		0+074.56		0+104.11		0+130.56

GK-Kozjak 26

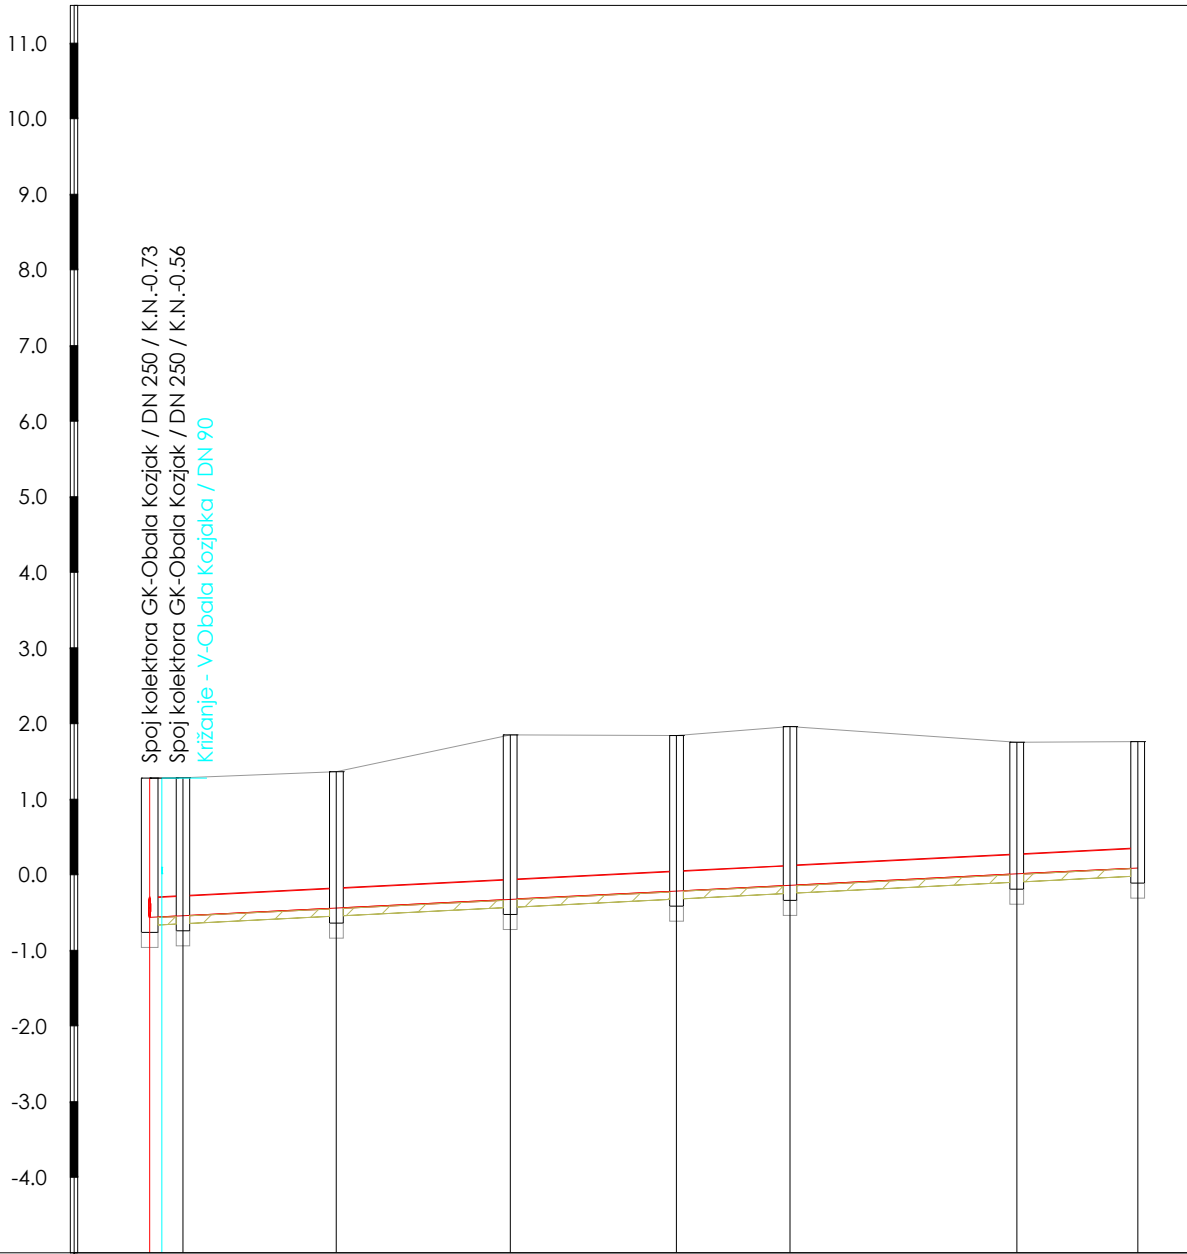

OZNAKA I RAZMAK ČVOROVA	k660	4.28	k683	20.28	k682	23.00	k681	22.00	k680	15.00	k679	30.00	k678	16.00	k677
MATERIJAL I UNUTARNJI PROFIL CIJEVI	GRP 250mm														
NAGIB NIVELETE	5.0 ‰														
OPIS OKNA	GRP Ø 1000		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800
KOTA TERENA [m n.m.]	1.28		1.29		1.36		1.83		1.84		1.94		1.75		1.74
KOTA NIVELETE [m n.m.]	-0.56		-0.54		-0.44		-0.32		-0.21		-0.14		0.01		0.09
KOTA DNA ROVA [m n.m.]	-0.67		-0.45		-0.35		-0.43		-0.32		-0.25		-0.10		-0.02
DUBINA ISKOPA ROVA [m]	1.95		1.93		1.91		2.28		2.16		2.21		1.85		1.78
HORIZONTALNI KUT			149.94°		178.09°		179.73°		180.69°		180.01°		179.78°		
VERTIKALNI KUT			0.00°		0.00°		0.00°		0.00°		0.00°		0.00°		
STACIONAŽA TERENA	0+000.00		0+004.42		0+024.70		0+047.70		0+069.70		0+084.70		0+114.70		0+130.70

GK-Kozjak 28

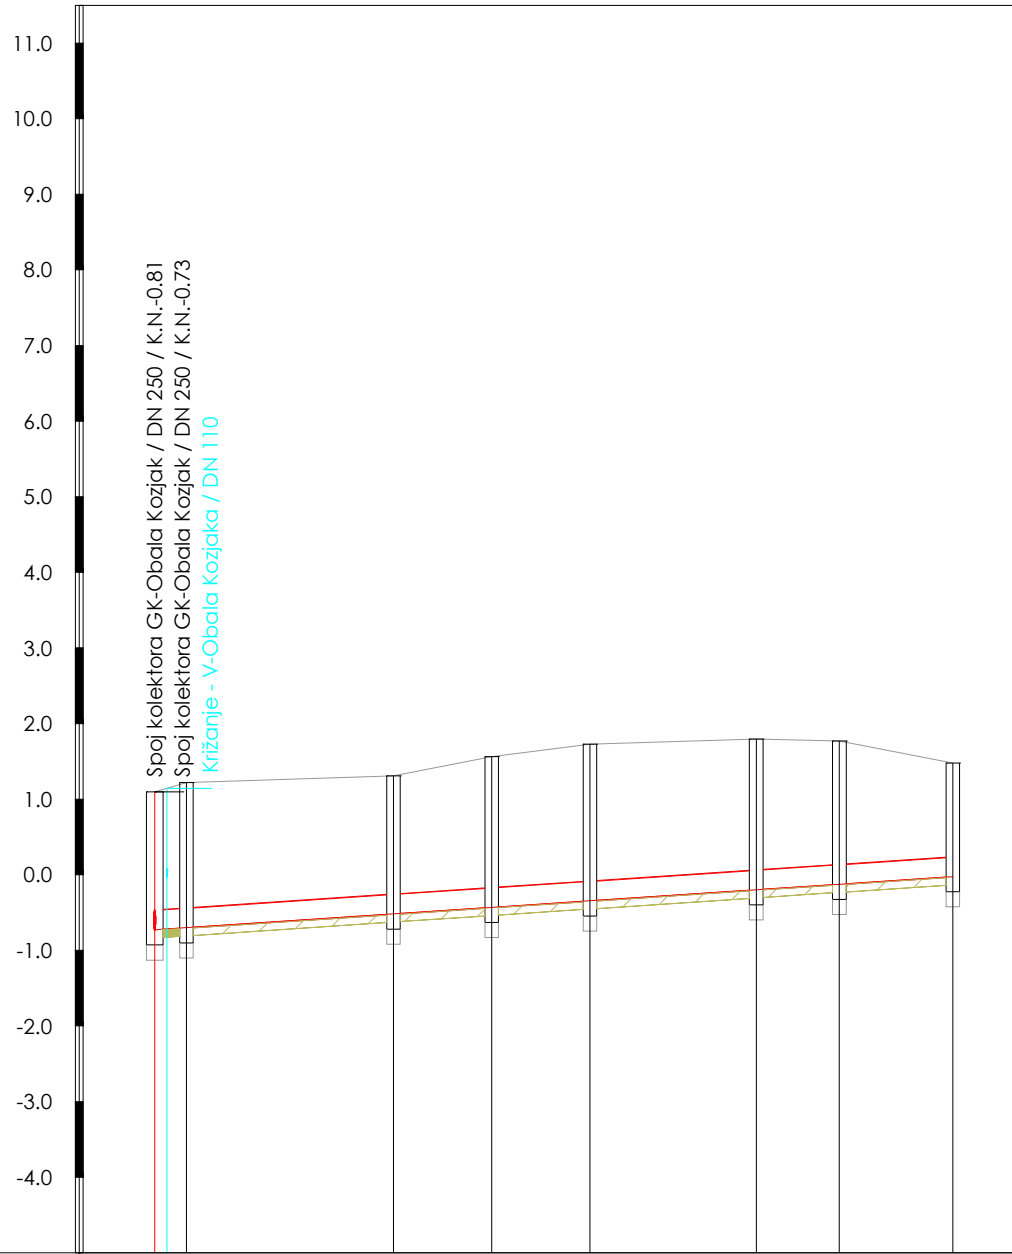

OZNAKA I RAZMAK ČVOROVA	k661	4.28	k690	27.38	k689	13.00	k688	12.99	k687	22.00	k686	11.00	k685	15.00	k684
MATERIJAL I UNUTARNJI PROFIL CIJEVI	GRP 250mm														
NAGIB NIVELETE	6.7 ‰														
OPIS OKNA	GRP Ø 1000		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800		GRP Ø 800
KOTA TERENA [m n.m.]	1.10		1.22		1.31		1.54		1.73		1.79		1.77		1.48
KOTA NIVELETE [m n.m.]	-0.73		-0.70		-0.52		-0.43		-0.34		-0.20		-0.12		-0.02
KOTA DNA ROVA [m n.m.]	-0.84		-0.81		-0.62		-0.54		-0.45		-0.30		-0.23		-0.13
DUBINA ISKOPA ROVA [m]	1.93		2.03		1.94		2.10		2.18		2.10		2.00		1.61
HORIZONTALNI KUT			139.48°		178.94°		181.23°		179.45°		179.42°		180.49°		
VERTIKALNI KUT			0.00°		0.00°		0.00°		0.00°		0.00°		0.00°		
STACIONAŽA TERENA	0+000.00		0+004.20		0+031.58		0+044.58		0+057.58		0+079.58		0+090.58		0+105.58

UZDUŽNI PROFILI
GK-Kozjak 22, GK-Kozjak 24, GK-Kozjak 26, GK-Kozjak 28
MJ 1: 1000/100